


# 4.0-6.0HP CEILING CASSETTE

## Premier Inverter Series



**R32**

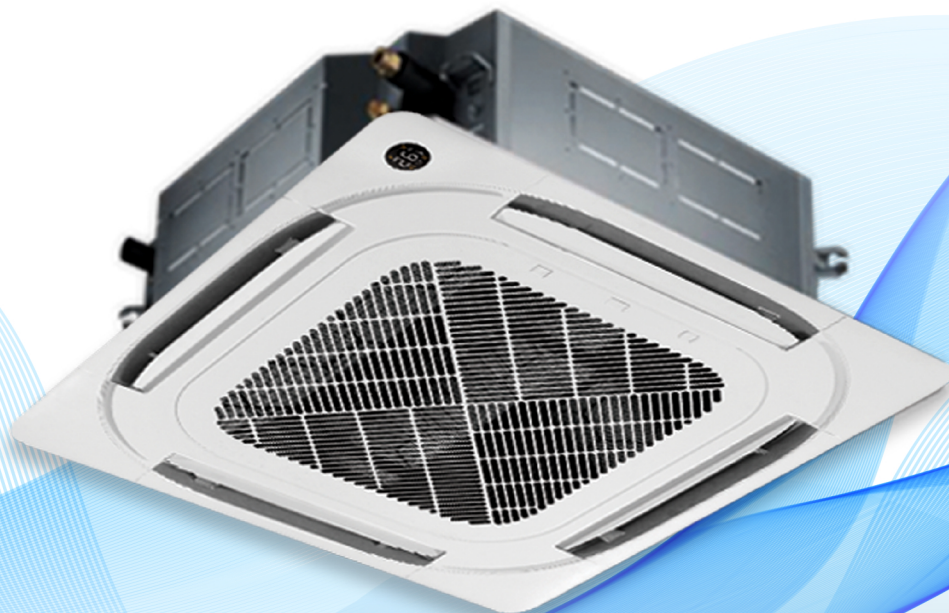

360 DEGREE AIRFLOW



DC INVERTER COMPRESSOR



TIMER



TURBO MODE



SLEEP MODE



AUTO RESTART



INDEPENDENT HUMIDIFICATION



SELF DIAGNOSIS

## SPECIFICATIONS

### Energy Saving

#### MODEL NUMBER

GRI-40CCN3 GRI-40OUN3	GRI-60CCN3 GRI-60OUSN3	GRI-60CCN3 GRI-60OUTN3
--------------------------	---------------------------	---------------------------

#### HP

4.0	6.0	6.0
-----	-----	-----

#### TECHNICAL DATA

#### UNIT

#### Cooling Capacity

Btu/h

36,000	55,000	55,000
--------	--------	--------

#### Power Supply

V,Hz,Ph

230,60,1	230,60,1	230,60,3
----------	----------	----------

#### Power Input

W

4,300	6,600	6,290
-------	-------	-------

#### Rated Current

A

22	28.5	20.5
----	------	------

#### Pipe Size (L,G)

inch

3/8, 5/8	3/8, 3/4	3/8, 5/8
----------	----------	----------

#### Pipe Length / Difference

m

30/20	50/30	50/30
-------	-------	-------

#### Indoor Airflow (H/M/L)

m<sup>3</sup>/h

1,550/1,450/1,250	2,000/1,800/1,630	2,100/1,800/1,500
-------------------	-------------------	-------------------

#### Application Area

m<sup>2</sup>

48~70	69~102	69~102
-------	--------	--------

#### PHYSICAL DATA

#### UNIT

#### Indoor Dimension (WxDxH)

mm

830x830x245	830x830x287	830x830x287
-------------	-------------	-------------

#### Outdoor Dimension (WxDxH)

mm

946x420x810	952x420x1,333	946x410x810
-------------	---------------	-------------

#### Indoor Net/Gross Weight

Kg

27.8/32.7	29.8/35.1	29.8/35.1
-----------	-----------	-----------

#### Outdoor Net/Gross Weight

Kg

54.1/59.1	91.9/106	-
-----------	----------	---

Note: \* OUSN3(1Ph) \*OUTN3 (3Ph)